

# Photovoltaic based DVR for Improving the Operation of wind farm

M. Farsadi<sup>1</sup>, A.Gara Shahrak<sup>1</sup>, F.Salehpour Oskouyi<sup>2</sup>

<sup>1</sup>Department of electrical engineering, faculty of engineering, university of Urmia, Urmia, Iran  
m.farsadi@urmia.ac.ir, aligarashahrak@yahoo.com

<sup>2</sup>Department of mechanical engineering, university of Tabriz, Tabriz, Iran  
Farzin\_salehpour@yahoo.com

## Abstract

Wind power is one of the most important kind of renewable energies. Wind farm as a device which receives this energy needs some special conditions to work properly. The most common type of wind turbine is the variable-speed directly connected to the grid. Faults in the power system can originate the disconnection of wind farms. Dynamic voltage restorer (DVR) is a custom power device used for eliminating voltage sags and swells which is the result of the faults. This paper presents a simulation model of a 12-pulse DVR using photovoltaic (PV) as a mean of providing an alternative energy source for the DVR. Simulations were carried out using the MATLAB SIMULINK. The simulation results proved the capability of PV-based DVR in eliminating voltage sag and swell distributed system. Improving the operation of wind farm as a energy generator and stabilizing its voltage is the main result of this work.

## 1. Introduction

In recent years, wind power is going to be one of the most important energy among those that are used due to low cost and renewability. Wind turbine as a device that receives wind energy must work in special condition. For example the generators of turbine should have been stabilized. Thus the voltage and current of generators which connected to the bus should be steady. This process eliminates voltage harmonic and voltage sag/swell in the generators that are connected to the bus. To achieve this, the device named Dynamic Voltage Restorer (DVR) is used. This device controls the voltage of bus and removes the voltage sag/swell through fault time. So the voltage quality in generators is increased.

Design details of various DVRs are described in a lot of researches ([1] & [2]). Also, several studies on DVR control methods have been done ([4]). Most researches are developed on the control strategy that uses open loop feed forward [3]. On the other hand there is another method that combine the open-loop feed forward approach and close loop feedback [4] to compensate the instability.

The structure of DVR includes a DC source that can provide the power of injection. In this paper, instead of DC source connected to the DVR, the Photovoltaic (PV) have been used. PV energy is derived from a completely safe energy that is renewable and the cost is low in compare with other energies. Use this type of energy, including wind energy, due to being natural in power system, is growing day by day. Recently, several studies about the connection of Distributed Generating (DG) to the power system by the Power Electronic Systems has been done. Energy from PV is an example of DGs.

## 2. Power system and DVR model

Studied power system as shown in Figure 1 includes a wind turbine. Specifications and parameters of the wind farm are taken from [5].

Wind turbine has six 1.5 Mw variable speed generator that each of them is directly connected to the network with a capacitor bank and transformer. Wind energy converters which are discussed in mechanical system are divided into two major groups (wind turbine and rotor electrical) that these two parts are connected to the shaft. Gear Ratio in this model is 45 ( $N_{gb} = 45$ ) and the number of pairs of poles is also 2. Nominal speed of the turbine is 30 rpm.

DVR is one of the important tools of power electronics. It is used to stabilize the amount of voltage in the bus of sensitive loads. The Primary work of DVR is the compensation of the voltage sag/swell. Although DVR able to do functions such as mitigating harmonics, reducing the transient state of voltage and compensating the fault. DVR includes a DC source. In this paper instead of this source we use photovoltaic (PV). Details are described in figure 1.


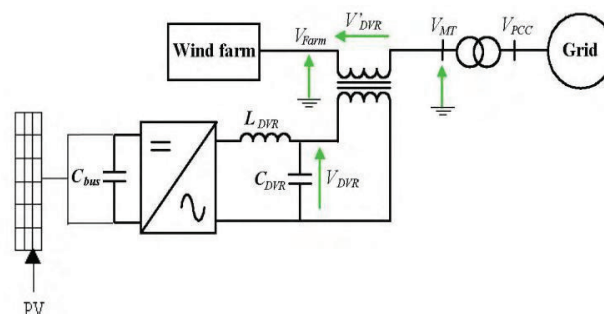


Fig.1. general system

### 2.1. Performance of DVR

DVR is used to protect sensitive electrical loads like large semiconductors, auto switches in power electronic and etc against power system disturbances. Using DVR for stabilizing the wind turbines is one of its new applications. In this paper, instead of maintaining sensitive load, protection of the variable speed generator which is sensitive to voltage changes is the main task of DVR. Recently, researches in this area are lead toward improving the behavior of wind turbines against severe disturbances [6]. DVR should provide necessary voltage to control power factor in the junction of wind turbine. It means that DVR should keep the voltage at a determined value. In fact the reactive power compensation is the main task of DVR.

If the DVR has been used for protection of load, the voltage, current and power should be remained constant in the compensation period. Figure 2 shows the compensation mode as phase diagram in two cases of absorption and injection of reactive power. compensating by reactive power absorption using DVR is shown in Figure 2-a. figure 2-b shows the compensation by injecting reactive power using DVR.

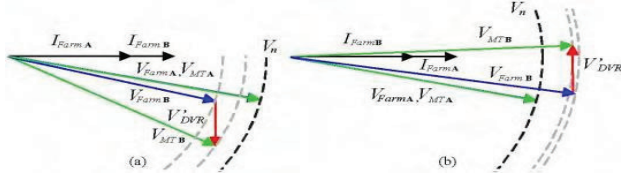

**Fig.2.** Reactive power compensation to control the power factor (a). Reactive power absorption, (b). reactive power injection

compensator absorbs reactive power when the lagging power factor in point of common coupling (Pcc) is obtained and wind turbine voltage is less than Medium voltage (MT). Similarly DVR injects into the network when the leading power factor in Pcc is obtained and wind turbine voltage is greater than MT voltage. The ideal case occur when the wind turbine voltage is equal to MT voltage.

## 2.2. DVR control

The main goal of DVR is defined as maintaining a constant voltage of sensitive load bus in the state of disturbance of power system. This control method is based on comparing source and load voltages. Difference of these voltages determines the dynamic behavior of DVR. It compares this voltage difference with the amount of reference voltage and makes voltage capture or voltage injection.

In this control method, voltage of wind turbine is measured. This voltage is changed to “dqo” using Park converting:

$$f_{dqo} = T f_{abc} \quad (1)$$

$$\text{where } (f_{dqo})^T = (f_q f_d f_o) \quad (2)$$

$$(f_{abc})^T = (f_a f_b f_c) \quad (3)$$

$$T = \frac{2}{3} \begin{bmatrix} \cos \theta & \cos(\theta - \frac{2\pi}{3}) & \cos(\theta + \frac{2\pi}{3}) \\ \sin \theta & \sin(\theta - \frac{2\pi}{3}) & \sin(\theta + \frac{2\pi}{3}) \\ \frac{1}{2} & \frac{1}{2} & \frac{1}{2} \end{bmatrix} \quad (4)$$

$$w = \frac{d\theta}{dt} \quad (5)$$

Inverse matrix of Park converting is


$$T^{-1} = \begin{bmatrix} \cos \theta & \sin \theta & 1 \\ \cos(\theta - \frac{2\pi}{3}) & \sin(\theta - \frac{2\pi}{3}) & 1 \\ \cos(\theta + \frac{2\pi}{3}) & \sin(\theta + \frac{2\pi}{3}) & 1 \end{bmatrix} \quad (6)$$

Angular velocity  $\omega$  and displacement  $\theta$  are calculated by

$$\theta = \int \omega dt \quad (7)$$

After converting the voltage to dqo, Voltage is constant in the normal and balanced condition. d-voltage is unity in p.u. and q-voltage is zero in p.u. but during the abnormal condition it varies.

After comparison d-voltage and q-voltage with the desired voltage in distributed condition, difference of these voltages is improved by PI controller and then it is converted into abc component using dqo to abc transformation. So the  $u_{ref}$  signal which is the main signal in switching is produced. This process is shown in figure 3.

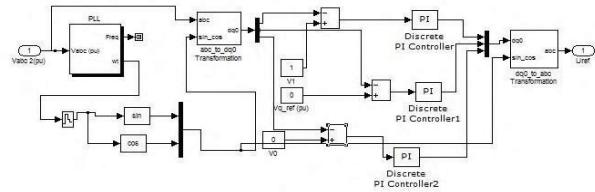

**Fig.3.** control block diagram for DVR

In figure 3, Phase Locked Loop (PLL) is used to produce cosine and sine wave in the main phase of voltage.  $u_{ref}$  which comes from the control block in figure 3 is used to generate pulses in switching logic.

This logic is shown below:

If  $u_{ref} > h$  , then  $u = +1$

If  $u_{ref} \leq h$  , then  $u = -1$

For switching in DVR we should do like below:

If  $u = 1$  then turn on the pair  $a_1-a_3$

If  $u = -1$  then turn on the pair  $a_2-a_4$

The other two phases are like them too.


## 2.3. PV and wind farm

PV system is a nonlinear energy source and its output power heavily influenced by the two components of radiation and ambient temperature. One disadvantage of these systems is their low impact. Because solar cells rarely work in the maximum power point we use some methods to obtain maximum power or use converter for improving the effectiveness. Here we use P & O Method with DC / DC converter to get the maximum power in solar cells [7].

wind farm consisting of six 1.5 MW wind turbines connected to a 25 kV distribution system .Wind turbines using a doubly-fed induction generator (DFIG) consist of a wound rotor induction generator and an AC/DC/AC IGBT-based PWM converter modeled by voltage sources. The stator winding is connected directly to the 50 Hz grid while the rotor is fed at variable frequency through the AC/DC/AC converter. The DFIG technology allows extracting maximum energy from the wind for low wind speeds by optimizing the turbine speed, while minimizing mechanical stresses on the turbine during gusts of wind.

### 3. Simulation and Results

DVR that is used in simulation as well as wind turbines and transmission line is shown in Figure 4.

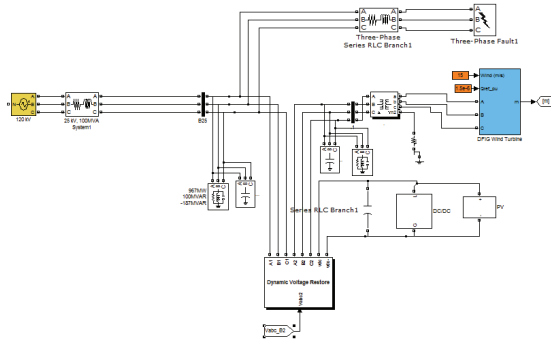

**Fig.4.** overall control circuit of DVR

The DVR is connected in series with transmission line. DVR is composed of a half-bridge converters for each phase that each converter has four switches. MOSFET is used in this sample. For switching each phase we need two pulses. Switching frequency is about 2KHz. Also we use an AC filter (usually a capacitor) at DVR output for removing the harmonics of switching.

In this case we use PV instead of batteries for feeding of DC link which is connected to the DC capacitor.

Wind turbine used in this simulation consists of six generators 1.5Mw with DFIG and the average wind speed is considered 15m/s.

for making disturbance in the circuit we use a three phase fault which is applied to the network at the time between  $t = 0.05$  and  $t = 0.2$ .

Parameters of the power network and used in the simulation are expressed in table 1. Characteristics of wind turbine are expressed in table 2.


**Table 1.** Power network parameters

System frequency	50 Hz
Source voltage	25 KV
Line Impedance	$(0.605+4.84j) \Omega$
3-phase transformer	10 MVAR, 25 KV/600V
Capacitor filter	50 $\mu$ F
DC capacitor	10000 $\mu$ F
Single phase transformer	10 MVAR, 10 KV/25 KV
PV	800 KW


**Table 2.** Wind turbine characteristics

Nominal power	500 KW
Induction gen	600 V, 50 Hz
Air density	2.22 kg/m <sup>3</sup>
Sweep area	176.6 m <sup>2</sup>
$C_{p,max}$	0.411


The simulation begins with 50% voltage swell of source. figure 5 shows the network voltage in swell condition which is occurred during the time between  $t = 0.05$  and  $t = 0.15$ . DVR injects voltage to compensate voltage swell and wind farm voltage will remain constant. The injection voltage of DVR is shown in figure 6. Figure 7 shows the stable wind farm voltage.

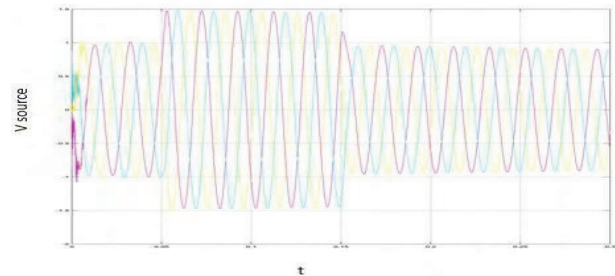

**Fig.5.** supply voltage in swell condition

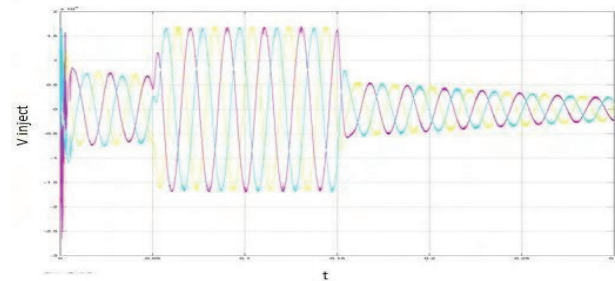


**Fig.6.** DVR injection voltage in swell condition

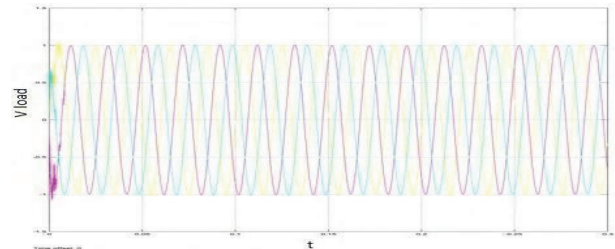


**Fig.7.** wind farm voltage in swell condition after compensation

After applying fault in the network between the times  $t = 0.05$  and  $t = 0.15$  it is seen that the network voltage drop of about 50%. In this simulation DVR cause voltage and current to


be constant by injecting voltage to the network and thus the power of wind turbine become constant too. Figure 8 shows the voltage dropping of network. The injection voltage of DVR is shown in figure 9. figure 10 shows the wind farm voltage after applying fault.

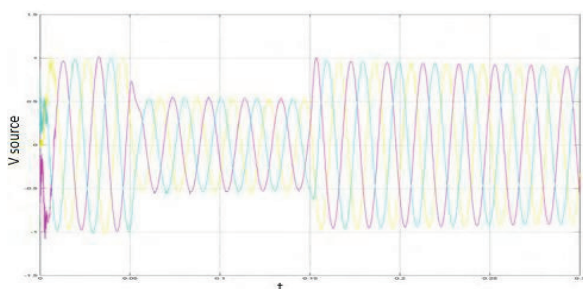

**Fig.8.** supply voltage in sag condition

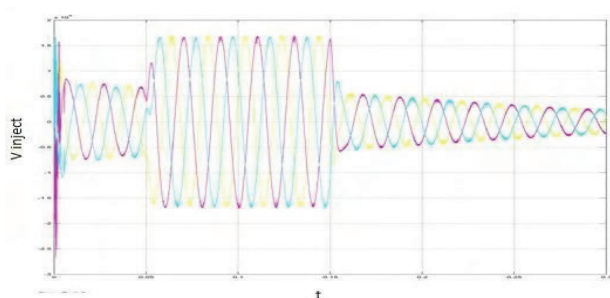


**Fig.9.** DVR injection voltage in sag condition

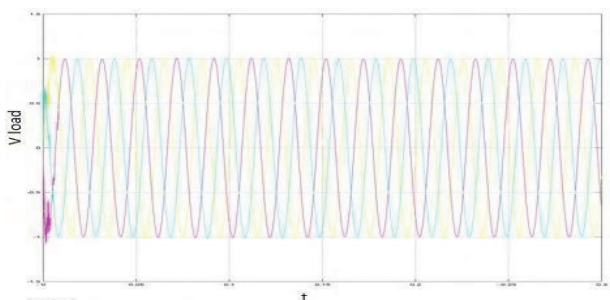

**Fig.10.** wind farm voltage after compensation

Terminal current of wind turbine is shown in figure 11. It is reached to stable condition after a little time.

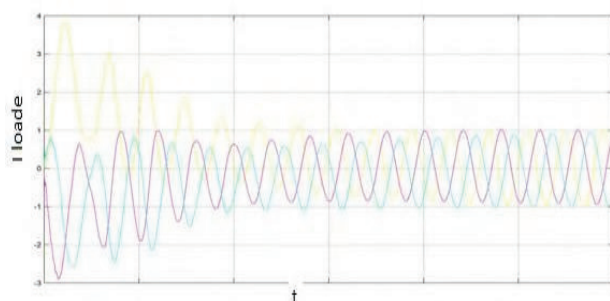

**Fig.11.** wind farm current after compensation (in both sag and swell condition)

## 4. CONCLUSION

In this paper, A 12-pulse DVR is designed and through using new control method all voltage sags and swells in the circuit are generally compensated. The DVR is modeled with a new feedback controller scheme to control the 12 IGBT switches of the inverter. The DVR output is filtered in order to mitigate the harmonics generated from switching. In this case the terminal voltage which is connected to the wind turbine stay constant and despite the voltage instability in network wind generators will be able to remain connected to the network and work in stable condition through using DVR. Also in this paper to provide a DC source of DVR we have used PV which is a kind of natural energy source. Simulation results prove that the PV can be a useful alternative DC source for the DVR.

## 7. References

- [1] N. G. John and B. Frede, "A detailed comparison of system topologies for Dynamic Voltage Restorers", 2005 IEEE transaction on Industry Application, Vol .41, 272-1280.
- [2] H. Awad, J. Svensson, and M. Bollen, "Mitigation of unbalanced voltage dips using static series compensator" IEEE Trans. Power Electron., vol. 19, pp. 837-846, May 2004
- [3] J. Geza, C. Su and L. Luiz, "Closed Loop state variable control of Dynamic Voltage Restorer with fast compensation characteristics", Industry application Conf., 39th IAS Annual Meeting Conference Record of the 2004, Vol 4, 2252-2258.
- [4] K. Hyosung and S. Ki, "Compensation voltage control in Dynamic Voltage Restorer by Use of feed forward and state feedback scheme", 2005 IEEE transaction on power electronics, Vol.20, 1169-77.
- [5] Z. Saad-Saoud, M. L. Lisboa, J. B. Ekanayake, N. Jenkins, and G. Strbac, "Application of STATCOMs to wind farms " Proc. Inst. Elect.Eng., Gen., Transm., Distrib., vol. 145, no. 5, pp. 511-516, Sep. 1998.
- [6] GAMESA EOLICA S.A. J.I. Llorente, M. Visiers Guixot. "Procedimiento y dispositivo para evitar la desconexión de un parque de generación de energía eléctrica de la red", Patent demand, 2004.
- [7] M.Hossinpour, Y.Mohamadrezapour and S.Torabzadeh "Combind Operation of Unified Power Quality Conditioner and Photovoltaic Array", Journal of Applied sciences 9, vol.4, pp.680-688, 2009